


1. Q: After updating BIOS to support Ivy Bridge CPU, there's an unknown device "INT33A0" in device manager. What should I do?

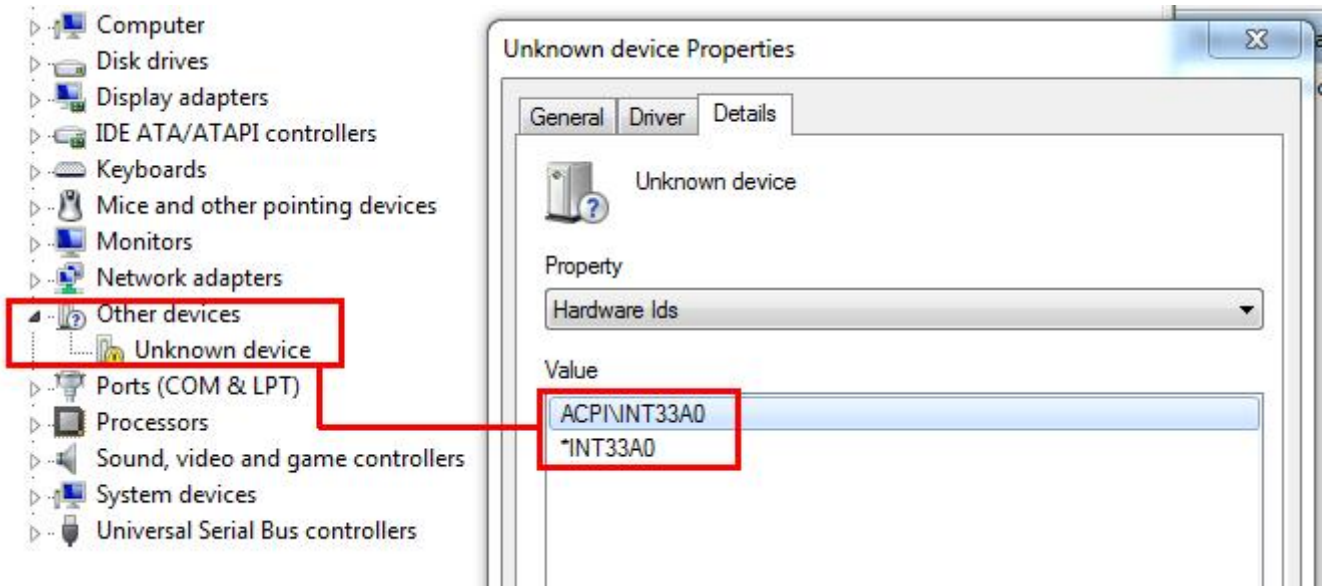


A: It's Intel Smart Connect device. You can disable Intel Smart Connect option in BIOS, or follow below steps to install corresponding driver.

Step 1: Download Intel Smart Connect driver from our website:

<http://www.asrock.com/support/download.asp>

	2011/9/30	Windows® 7 64bit	1.77MB	modern partition first, then install the Intel Rapid Start driver...	[Installation Guide]
	2011/9/30	Windows® 7 64bit	8.63MB	Intel Smart Connect driver ver:2.0.1083.0	[Installation Guide]
	2011/9/30	Windows® 7 64bit	5.50MB	Realtek Lan driver ver:7.044	
	2011/9/30	Windows® 7 64bit	643.37KB	AppCharger ver:1.0.5	

Step 2: Install the driver and reboot system.

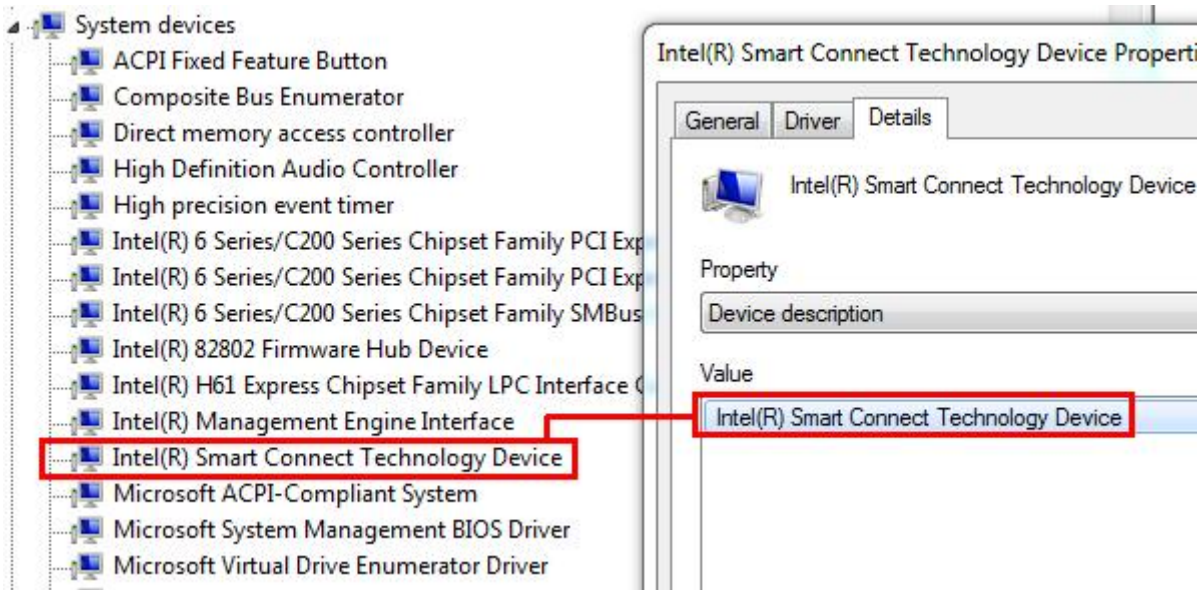

2. Q: I can not enter LSI MegaRaid 9240-8i RAID ROM with ASRock X79 platform, how could I do?

A: Please disable all bootable devices under BIOS, then save and leave.



When system boot up, please press <Ctrl+h> to enter LSI RAID ROM.

```
LSI MegaRAID SAS-MFI BIOS
Version 4.14.00 (Build Jan 29, 2010)
Copyright(c) 2010 LSI Corporation
HA -0 (Bus 3 Dev 0) MegaRAID SAS MR9240-01
FW package: 20.5.1-0003

Battery Status: Not present

PCI SLOT ID  LUN VENDOR      PRODUCT                REVISION  CAPACITY
-----
20           LSI          MegaRAID SAS MR9240-01          0MB

0 JBOD(s) found on the host adapter
0 JBOD(s) handled by BIOS

0 Virtual Drive(s) found on the host adapter.

0 Virtual Drive(s) handled by BIOS
Press <Ctrl><H> for WebBIOS or press <Ctrl><V> for Preboot CLI
```

After setup finish, in order to restore bootable devices, please enter BIOS again and load BIOS default.

3. Q: I was connected a HDD on N68 series motherboard with 3TB capacity, why the HDD capacity only detect 768GB in Windows 7 installation.

A: Please use Windows 7 installation disk with Service Pack1 (SP1) included.