VIA® PV530 CPU + VX900 Chipset



< < <


Mini-ITX Form Factor: 6.7-in x 6.7-in, 17.0 cm x 17.0 cm Solid Capacitor for CPU power











Detail Specification

Platform



Addio	
LAN	- Realtek PCIE x1 LAN 8105E

Speed: 10/100 Etherne Supports Wake-On-LAN Rear Panel I/O I/O Panel

1 x PS/2 Mouse Port 1 x PS/2 Keyboard Port - 1 x Parallel Port (ECP/EPP Support) - 1 x Serial Port: COM1

1 x VGA Port 4 x Ready-to-Use USB 2.0 Ports

1 x RJ-45 LAN Port with LED (ACT/LINK LED and SPEED LED) HD Audio Jack: Line in / Front Speaker / Microphone

Connector - 2 x SATAII 3.0 Gb/s connectors CPU/Chassis FAN connector

24 pin ATX power connector Front panel audio connector 2 x USB 2.0 headers (support 4 USB 2.0 ports)

4Mb AMI Legal BIOS **BIOS Feature**

Supports "Plug and Play"
ACPI 1.1 Compliance Wake Up Events

Supports jumperfree SMBIOS 2.3.1 Support

- Drivers, Utilities, AntiVirus Software (Trial Version), ASRock Software Suite (CyberLink DVD Suite - OEM and Trial; Creative Sound Blaster X-Fi MB - Trial) **Support CD**

Unique Feature ASRock OC Tuner Instant Boot - ASRock Instant Flash - ASRock OC DNA

os

- Hybrid Booster: - CPU Frequency Stepless Control

- ASRock U-COP - Boot Failure Guard (B.F.G.)

Hardware Monitor Chassis Temperature Sensing CPU Fan Tachometer Chassis Fan Tachometer CPU Quiet Fan
CPU/Chassis Fan Multi-Speed Control
Voltage Monitoring: +12V, +5V, +3.3V, CPU Vcore

CPU Temperature Sensing

Microsoft® Windows® 7 / Vista™ / XP compliant

FCC, CE, WHQL Certifications - ErP/EuP Ready (ErP/EuP ready power supply is required)

Quick Installation Guide, Support CD, I/O Shield Accessories 2 x SATA Data Cables (Optional)



















Product Brief <<<

- VIA® PV530 Processor (1.8 GHz)
- Solid Capacitor for CPU power
- VIA® VX900 Chipset
- FSB 800 MHz
- Supports DDR3 1066 memory
- 1 x PCI slot
- Integrated VIA® Chrome9 HD DX9 Graphics, DirectX 9.0
- Supports ASRock Instant Boos, Instant Flash, **OC Tuner, OC DNA, Multi-Speed Fan Control**
- ErP/EuP Ready
- Free Software: CyberLink DVD Suite OEM and Trial; Creative Sound Blaster X-Fi MB - Trial

VIA® PV530 CPU + VX900 Chipset



ASRock PV530-ITX VS G31 Ref MB

OS: Windows 7 Ultimate 32 bit

	PV530-ITX (VIA VX900) CPU: VIA PV530 1.8GHz DRAM: DDR3-800 2Gx1	G31 Ref MB CPU : Celeron 420 1.6 GHz DRAM : DDR2-800 2Gx1
Windows 7 Performance (Graphics)	3.2	3
Windows 7 Performance (Gaming Graphics)	3.1	3.1
Windows 7 Performance (Primary hard disk)	5.8	5.9
Power Consumption (Idle) (Watt)	42	53
Power Consumption (Full loading @ Prime95) (Watt)	53	61

ASRock PV530-ITX VS Gigabyte EG41MF-S2H

Model:	ASRock PV530-ITX	Gigabyte EG41MF-S2H
Chipset:	VX900	G41 + ICH7
CPU:	VIA PV530	Celeron 420
RAM:	GSKill DDR3-800 2GBx1	GSKill DDR2-800 2GBx1
VGA:	onboard	onboard
HDD:	Western Digital WD5000AAKS	Western Digital WD5000AAKS
PSU:	Corsair HX 850W	Corsair HX 850W

Model Name	Windows 7 OS Installation time	Time to boot up to Windows 7
ASRock: PV530-ITX (PV530 CPU + VIA VX900 Chipset)	25m25.03s Win	44.85s Win
Gigabyte EG41MF-S2H (Celeron 420 CPU + Intel G41 Chipset)	29m44.52s	54.06sec

ASRock Mini-Itx Motherboard - PV530-Itx






VIA® PV530 CPU + VX900 Chipset







ASRock AIWI Quick Start Guide









VIA® PV530 CPU + VX900 Chipset





OC DNA

Save your OC settings as a profile and share with friends. Try OC DNA now!

OC DNA Instruction


Step 1

Save your BIOS OC settings as User Default in BIOS OC Tweaker menu. (For example: we name this User Default setting as "CPU_OC3.8GHz")




Step 3

Press "Save" button to save the "CPU_OC3.8GHz" OC settings as a profile.



Step 5

When the friend receives your "CPU_OC3.8GHz" profile, he can press "Load" to load the "CPU_OC3.8GHz" profile in OC DNA.

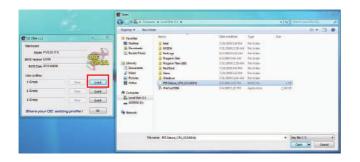

Now, you have successfully share your OC setting profile with your friends.

Step 2

Execute ASRock OC DNA under OS, you will find "CPU_OC3.8GHz" as User Profile 1.



Step 4

Send the "CPU_OC3.8GHz" profile to other friends.



Step 6

After that, the friend can enter into BIOS OC Tweaker menu to load the "CPU_OC3.8GHz" profile as his BIOS OC settings.



VIA® PV530 CPU + VX900 Chipset





ASRock Instant Boot

ASRock Instant Boot is a new feature invented exclusively by ASRock. It can boot up system in an amazing speed,

which is 10 times faster than traditional boot up. For home users or office PC users, ASRock Instant Boot can also

guarantee a clean Windows OS, and consumed less power! For details: http://www.asrock.com/feature/InstantBoot/index.asp

- * This function is applicable ONLY to single user that does not secure ID and Password to their systems.
- * The boot up time depends on the hardware configuration.

10 Times Faster, Only 4 Secs to Boot Up to Windows!

ASRock YouTube

http://tw.youtube.com/watch?v=BucljXZVxXo



ASRock Instant Flash

ASRock Instant Flash is an exclusive and the most userfriendly BIOS flash utility developed by ASRock. It is embedded in Flash ROM which is used to update the system BIOS without having to enter operating systems like MS-DOS or Windows.



Features

Once executing ASRock Instant Flash, the utility will automatically detect all devices such as USB, hard disk or even floppy drive to find the exact BIOS for your system. Instead of giving you all BIOS in your devices, the Instant Flash just list BIOS versions that apply to your motherboard model only. For example, if you have many different BIOS of different motherboards saved in your devices, but you just need to flash your P45 motherboard, the Instant Flash will just list the P45 BIOS versions for you. This unique function allows you to easily select the suitable BIOS version instead of browsing through all data.



Instant Flash just list BIOS versions that apply to your motherboard model.





Click and start Flashing!













CyberLink Power2Go 6.1 LE OEM

Power2Go 6 lets you burn and backup videos, photos, music and data onto Blu-ray Discs and DVDs.

CyberLink MediaShow 4.1 SE OEM

Photo and video management software MediaShow edits videos and photos instantly, creates slideshow, and allows publishing directly to YouTube and Flickr.

CyberLink PowerDVD 8.0 DTS Trial

World-renowned PowerDVD 8 DTS delivers outstanding DVD movie playback quality on your PC.

CyberLink PowerDirector 8.0 Trial

PowerDirector - Video Editing software – edits high-definition videos including AVCHD, allows output to PSP iPod and Blu-ray Disc.

CyberLink PowerBackup 2.5 Trial

PowerBackup backups valuable data on your PC.

Creative Sound Blaster X-Fi MB Trial

The Sound Blaster X-Fi MB solution provides premium audio quality, effects and features for PC systems equipped with onboard audio.

For gamers, the EAX® ADVANCED HD 4.0, with its state-of-the-art Multi-Environment rendering and reverb modelling, delivers a much more realistic and immersive 3D gaming experience than your motherboard audio ever will.