


# P45TS

Intel® P45 + ICH10 Chipsets

**ASRock**  
www.asrock.com

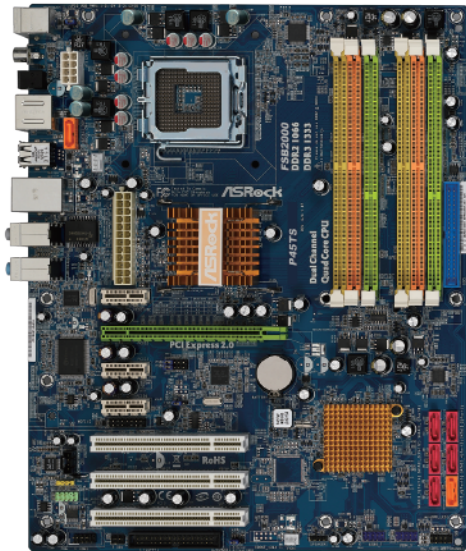

FSB <b>2000</b> MHz	<b>2 x DDR3</b> + <b>4 x DDR2</b>	DDR3 1333 + DDR2 1066
<b>PCI-E 2.0</b>	PCI-E <b>Gigabit LAN</b>	Coaxial/Optical <b>SPDIF</b> Output
Solid Capacitor for CPU power	<b>OC Tuner</b>	<b>Smart BIOS</b>

## Product Brief <<<

- LGA 775 for Intel® Core™ 2 Extreme / Core™ 2 Quad / Core™ 2 Duo / Pentium® Dual Core / Celeron® Dual Core / Celeron®, supporting **Penryn Quad Core Yorkfield and Dual Core Wolfdale** processors
- **Solid Capacitor for CPU power**
- Compatible with **FSB2000/1600/1333/1066/800 MHz**
- Supports Dual Channel **DDR3 1333/1066** (2 x DIMM slots) with max. capacity up to 4GB and Dual Channel DDR2 1066/800/667 (4 x DIMM slots) with max. capacity up to 8GB
- 1 x **PCI Express 2.0** x16 slot (green @ x16 mode)
- **6 x SATAII 3.0 Gb/s** connectors, support NCQ, AHCI and Hot Plug functions
- 1 x **eSATAII 3.0 Gb/s** connector
- **PCI-E Gigabit LAN** 10/100/1000 Mb/s
- 7.1 CH Windows® Vista™ Premium Level HD Audio (ALC888 Audio Codec)
- 1 x **WiFi/E header**
- **Windows® Vista™ Premium 2008 Logo Ready**
- Supports **ASRock OC Tuner, I. O. T.** (Intelligent Overclocking Technology)
- Supports **Smart BIOS**
- **ASRock SPDIF I/O:** 1 x Coaxial SPDIF Out Port, 1 x Optical SPDIF Out Port, 1 x eSATAII port, 1 x RJ-45 LAN Port with LED, 6 x USB 2.0 Ports

## Detail Specification <<<

<b>Platform</b>	- ATX Form Factor: 12.0-in x 9.6-in, 30.5 cm x 24.4 cm - Solid Capacitor for CPU power
<b>CPU</b>	- LGA 775 for Intel® Core™ 2 Extreme / Core™ 2 Quad / Core™ 2 Duo / Pentium® Dual Core / Celeron® Dual Core / Celeron®, supporting Penryn Quad Core Yorkfield and Dual Core Wolfdale processors - Compatible with FSB2000/1600/1333/1066/800 MHz - Supports Hyper-Threading Technology - Supports Untied Overclocking Technology - Supports EM64T CPU
<b>Chipset</b>	- Northbridge: Intel® P45 - Southbridge: Intel® ICH10
<b>Memory</b>	- Dual Channel DDR3/DDR2 memory technology - 2 x DDR3 DIMM slots - Supports DDR3 1333/1066 non-ECC, un-buffered memory - Max. capacity: 4GB - 4 x DDR2 DIMM slots - Supports DDR2 1066/800/667 non-ECC, un-buffered memory - Max. capacity: 8GB
<b>Expansion Slot</b>	- 1 x PCI Express 2.0 x16 slot (green @ x16 mode) - 3 x PCI Express x1 slots - 3 x PCI slots
<b>Audio</b>	- 7.1 CH Windows® Vista™ Premium Level HD Audio (ALC888 Audio Codec)
<b>LAN</b>	- PCI-E x1 Gigabit LAN 10/100/1000 Mb/s - Realtek RTL8111B/RTL8111C - Supports Wake-On-LAN
<b>Rear Panel I/O</b>	ASRock SPDIF I/O - 1 x PS/2 Mouse Port - 1 x PS/2 Keyboard Port - 1 x Coaxial SPDIF Out Port - 1 x Optical SPDIF Out Port - 6 x Ready-to-Use USB 2.0 Ports - 1 x eSATAII Port - 1 x RJ-45 LAN Port with LED (ACT/LINK LED and SPEED LED) - HD Audio Jack: Side Speaker / Rear Speaker / Central / Bass / Line in / Front Speaker / Microphone
<b>Connector</b>	- 6 x SATAII 3.0 Gb/s connectors, support NCQ, AHCI and Hot Plug functions - 1 x eSATAII 3.0 Gb/s connector (shared with 1 SATAII port) - 1 x ATA133 IDE connector (supports 2 x IDE devices) - 1 x Floppy connector - 1 x IR header - 1 x COM port header - 1 x HDMI SPDIF header - CPU/Chassis FAN connector - 24 pin ATX power connector - 8 pin 12V power connector - CD in header - Front panel audio connector - 2 x USB 2.0 headers (support 4 USB 2.0 ports) - 1 x WiFi/E header
<b>BIOS Feature</b>	- 8Mb AMI BIOS - AMI Legal BIOS - Supports "Plug and Play" - ACPI 1.1 Compliance Wake Up Events - Supports jumperfree - SMBIOS 2.3.1 Support - CPU, DRAM, NB, SB, VTT Voltage Multi-adjustment - Supports I. O. T. (Intelligent Overclocking Technology) - Supports Smart BIOS
<b>Support CD</b>	- Drivers, Utilities, AntiVirus Software (Trial Version)
<b>Unique Feature</b>	- ASRock OC Tuner - Hybrid Booster: - CPU Frequency Stepless Control - ASRock U-COP - Boot Failure Guard (B.F.G.)
<b>Hardware Monitor</b>	- CPU Temperature Sensing - Chassis Temperature Sensing - CPU Fan Tachometer - Chassis Fan Tachometer - CPU Quiet Fan - Voltage Monitoring: +12V, +5V, +3.3V, CPU Vcore
<b>OS</b>	- Microsoft® Windows® 2000 / XP / XP 64-bit / Vista™ / Vista™ 64-bit compliant
<b>Certifications</b>	- FCC, CE, WHQL
<b>Accessories</b>	- Quick Installation Guide, Support CD, I/O Shield - Floppy/ATA 133 Cables - 2 x SATA Data Cables (Optional) - 1 x SATA 1 to 1 Power Cable (Optional)

The specification is subject to change without notice. The brand and product names are trademarks of their respective companies. Any configuration other than original product specification is not guaranteed.