

**1. Q:** When play non 3D DVD or Blu-ray with 3D TV, it is not smooth. How can I fix it?

**A:** Please kindly check your TV vender about the "Motion Plus" or similar function setting on your 3D TV.

For example:

1. Samsung 3D TV (UA46C7000WM), there is one "Auto Motion Plus" item on 3D TV, please set this option to "Clear" like below picture.



2. Sony 3D TV, it also has "Motion Flow" option on 3D TV, please set this option to "Clear".

**2. Q:** Why will the memory size be less than I install on post screen with P55, H55, X58, P67 and H67 series motherboards?

**A:** This is H55, P55, X58, P67 and H67 chipset normal behavior.

Due to the size is used for Intel CPU, post screen memory size will less than you install.

**3. Q:** When ION 330 series resumed from sleep or hibernation mode, the audio device may no longer work. How do I solve this problem?

**A:** Please kindly download the audio driver R2.53 or later from Realtek website and install it for solving this problem.

Link:

<http://www.realtek.com.tw/Downloads/downloadsView.aspx?Langid=1&PNid=24&PFid=24&Level=4&Conn=3&DownTypeID=3&GetDown=false>

**4. Q:** Why the MarvellTray.exe dialog box always show up while system boot into Windows 7 x64 every time?

**A:** Since the user account security level setting under Windows 7 64-bit.

After you update the Marvell driver and Utility to new version, this dialog box will not show up as before.

Please follow the steps as below to update Marvell driver and Utility.

1. Please uninstall Marvell driver and RAID utility which has installed on your system.

2. Please download and update Marvell driver and Utility by following link.

Marvell SATA3 driver ver:1.0.0.1051 download link:

[http://download.asrock.com/drivers/All/SATA3/Marvell\\_SATA3\\_Win7-64\(1.0.0.1051-WHQL\).zip](http://download.asrock.com/drivers/All/SATA3/Marvell_SATA3_Win7-64(1.0.0.1051-WHQL).zip)


Marvell RAID Utility ver:4.1.0.1909 download link:

5. Q: How to use the PCIE locker on my motherboard?


A: So far we have below PCIE locker types, please refer below:

Type1:

1. Before VGA card is installed, please move locker horizontally to the right side.

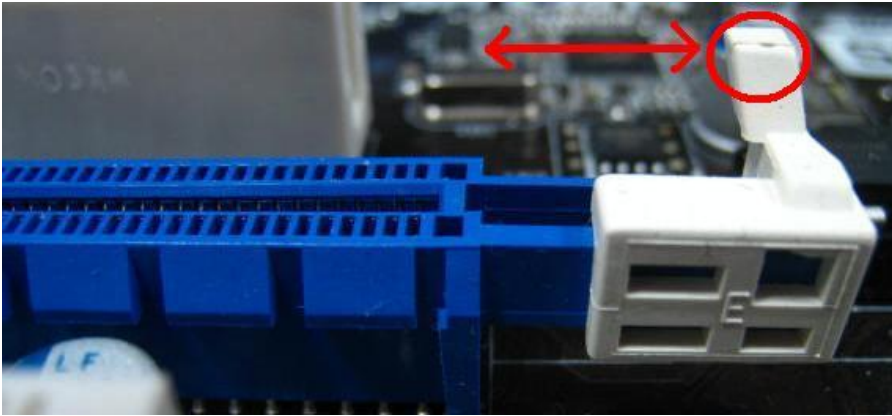

2. After install VGA card, please move the locker back to the position.

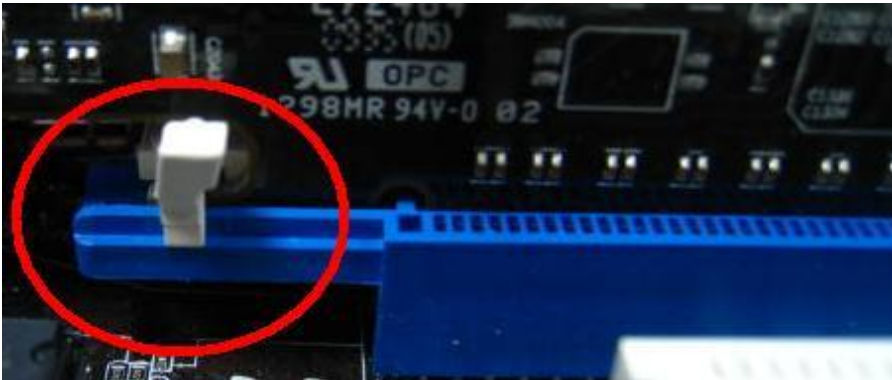

Type2:

1. Install VGA card vertically to PCIE slot.

2. To remove VGA card, please move the PCIE locker as shown below.



Type3:

1. Install VGA card vertically to PCIE slot.

2. To remove VGA card, please take up the VGA card vertically.

