
### FM2A55M-VG3 AMD A55 FCH (Hudson-D2)





| Detail Specification |   |
|----------------------|---|
| Platform             | - Micro ATX Form Factor<br>- All Solid Capacitor design   |
| CPU                  | - Support for Socket FM2 100W processors<br>- Supports AMD's Cool 'n' Quiet Technology<br>- UMI-Link GEN2   |
| Chipset              | - AMD A55 FCH (Hudson-D2)   |
| Memory               | Dual Channel DDR3 memory technology     2 x DDR3 DIMM slots     Supports DDR3 1866/1600/1333/1066 non-ECC, un-buffered memory     Max, capacity of system memory: 32GB     Supports Intel <sup>®</sup> Extreme Memory Profile (XMP) 1.3 / 1.2     Supports AMD Memory Profile (AMP)   |
| Expansion Slot       | - 1 x PCI Express 2.0 x16 slot (PCIE1 @ x16 mode)<br>- 1 x PCI slot<br>- Supports AMD Dual Graphics   |
| Graphics             | - Integrated AMD Radeon HD 7000 series graphics in A-series APU - DirectX 11, Pixel Shader 5.0 - Max. shared memory 2GB - Supports D-Sub with max. resolution up to 1920x1600 @ 60Hz - Supports ADD Steady Video <sup>10</sup> 2.0: New video post processing capability for automatic jutter reduction on home/online video  |
| Audio                | - 5.1 CH HD Audio (Realtek ALC662 Audio Codec)  |
| LAN                  | - POLE x1 Gigabit LAN 10/100/1000 Mb/s<br>- Reatek RTL8111E<br>- Supports LAN Cable Detection<br>- Supports Energy Efficient Ethernet 802.3az<br>- Supports PXE   |
| Rear Panel I/O       | I/O Panel<br>- 1 x PS/2 Mouse Port<br>- 1 x PS/2 Keyboard Port<br>- 1 x VGA Port<br>- 4 x Ready-to-Use USB 2.0 Ports<br>- 4 x R4-54 AN Port with LED (ACT/LINK LED and SPEED LED)<br>- HD Audio Jack: Line in / Front Speaker / Microphone  |
| Connector            | <ul> <li>4 x SATA2 3.0 Gb/s connectors, support RAID (RAID 0, RAID 1 and RAID 10), NCQ, AHCI and "Hot Plug" functions</li> <li>1 x Chassis Intrusion header</li> <li>1 x CPU Fan connector (4-pin)</li> <li>1 x Chassis Fan connector (4-pin)</li> <li>24 pin ATX power connector</li> <li>4 pin 12V power connector</li> <li>Front panel audio connector</li> <li>2 x USB 2.0 headers (support 4 USB 2.0 ports)</li> </ul>   |
| BIOS Feature         | - 64Mb AMI UEFI Legal BIOS with GUI support     - Supports "Plug and Play"     - ACPI 1.1 Compliance Wake Up Events     - Supports jumperfree     - SMBIOS 2.3.1 Support     - DRAM, SB Voltage Multi-adjustment  |
| Support CD           | - Drivers, Utilities, AntiVirus Software (Trial Version), CyberLink MediaEspresso 6.5 Trial,<br>Google Chrome Browser and Toolbar   |
| Unique Feature       | - ASRock Extreme Tuning Utility (AXTU)<br>- ASRock Instant Flash<br>- ASRock Astant Flash<br>- ASRock XFast USB<br>- ASRock XFast USB<br>- ASRock XFast LAN<br>- ASRock XFast RAM<br>- ASRock Crashless BIOS<br>- ASRock ORG (Online Management Guard)<br>- ASRock Internet Flash<br>- ASRock Internet Flash<br>- ASRock Chernet State<br>- ASRock Rept RAU Installer<br>- ASRock Rept RAU Installer<br>- ASRock Kast Dot<br>- ASRock Kast Boot<br>- ASRock Kastant U UEFI<br>- ASRock Restart to UEFI<br>- ASRock Kastart to UEFI<br>- ASRock Ku-COP |
| Hardware Monitor     | - CPU Temperature Sensing<br>- Chassis Temperature Sensing<br>- CPU Fan Tachometer<br>- Chassis Fan Tachometer<br>- CPU/Chassis Fan Multi-Speed Control<br>- CPU/Chassis Fan Multi-Speed Control<br>- CASE OPEN detection<br>- Voltage Monitoring: +12V, +5V, +3.3V, Vcore  |
| OS                   | - Microsoft® Windows® 8 / 8 64-bit / 7 / 7 64-bit / Vista™ / Vista™ 64-bit compliant  |
| Certifications       | - FCC, CE, WHQL<br>- ErP/EuP Ready (ErP/EuP ready power supply is required)<br>- Quick Installation Guide, Support CD, I/O Shield   |
| Accessories          | - 2 x SATA data cables  |



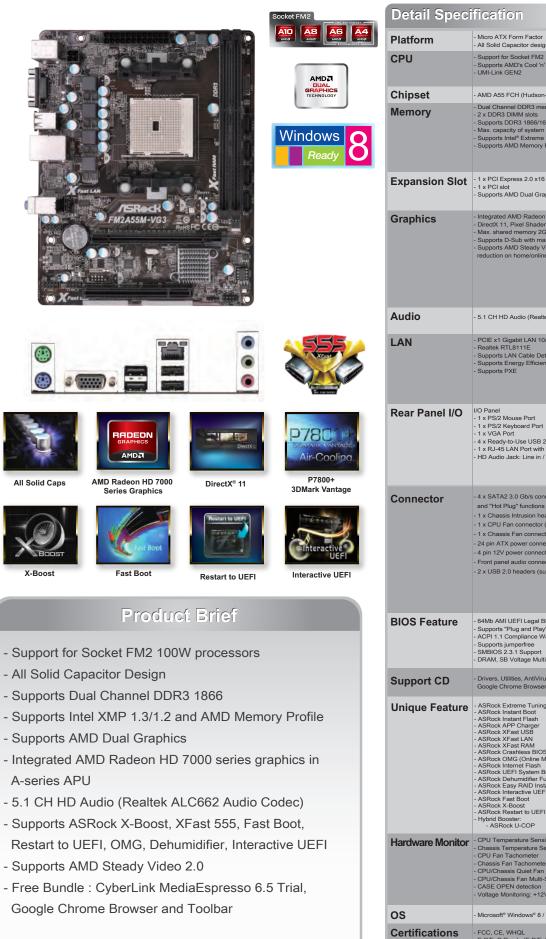

X-Boost

Brilliantly designed for smart overclocking, ASRock X-Boost Technology is able to unleash the hidden power of your CPUs. Simply press "X" when turning on the PC, X-Boost will automatically overclock the relative components to get up to 15.77% performance boost! With the smart X-Boost, overclocking CPU can become a near one-button process.

2.79 pts 2.411 pis ASRock FM2 Motherboard With X-Boost Other FM2 Motherboard Without X-Boost Cinebench R11.5



# Windows 8 Support

### Fast Boot

With ASRock's exclusive Fast Boot technology, it takes less than 1.5 seconds' to logon to Windows 8 from a cold boot. No more waiting! The speedy boot will completely change your user experience and behavior.

\*The boot time may vary with a different configuration.



### Restart to UEFI

ASRock "Restart to UEFI" technology is designed for those requiring frequent UEFI access. It allows users to easily enter the UEFI SETUP automatically when turning on the PC next time.



The specification is subject to change without notice. The brand and product names are trademarks of their respective companies. Any configuration other than original product specification is not guaranteed.

### FM2A55M-VG3 AMD A55 FCH (Hudson-D2)



#### **All Solid Capacitor** Design

All the capacitors on this board are built with 100% all solid capacitors. With these solid caps, ASRock motherboard is allowed to perform more stably and ensure longer lifetime.



### AMP & XMP

Not only supporting AMD Memory Profile (AMP), ASRock FM2 Motherboard Series also come with Intel XMP memory tuning kits, making it's easy to get maximum memory performance from your system.



#### **AMD Dual Graphics**

The AMD Dual Graphics technology combines APU and GPU computing power to optimize user's visual experience.



#### **AMD Steady** Video 2.0

Bringing the best video experience! Compared to v1.0, AMD Steady Video 2.0 provides more tech advances such as . Letter/Pillar Boxed Content, Indicator Overlay, Enhanced Algorithm Effectiveness, etc.



### ASRock OMG

Fast, Easy and Free – ASRock OMG technology allows you to establish an internet curfew or restrict internet access at specified times. Administrators are able to schedule the starting and ending hours of internet access granted to other



### DirectX<sup>®</sup> 11

DirectX® 11 is the very latest in high-speed, high-fidelity gaming and computing. It can enable not just more visually stunning games, but significant performance improvements in some of your favorite websites and everyday applications.



#### **ASRock** Dehumidifier

Users may prevent motherboard damages due to dampness by enabling "Dehumidifier Function". When enabling Dehumidifier Function, the computer will power on automatically to dehumidify the system after entering S4/S5 state



#### Interactive UEFI

ASRock Interactive UEFI is a blend of system configuration tools, cool sound effects and stunning visuals. The unprecedented UEFI provides a more attractive interface and brings a lot more amusing.



## (Online Management Guard)

users

AMD Radeon HD

Engineered for supremacy, designed for efficiency and packed with incredible

Series offers the world's most advanced

RADEON GRAPHICS

XFast 555 (XFast RAM, XFast LAN, XFast USB)

ASRock unique XFast 555 Technology (XFast RAM, XFast LAN, and XFast USB)

allows users to experience 5 times

performance, LAN speed and USB

transfer speed.

performance boost in terms of system

, the AMD Radeon HD 7000

7000 Series

Graphics

features

graphics.

Internet Flash searches for available UEFI firmware updates from ASRock servers System can auto-detect the latest UEFI from our servers and flash them within UEFI setup without entering Windows <sup>®</sup> OS.

> .

#### **Google Chrome** Browser & Toolbar

Chrome is a fast, simple, and secure web browser, built for the modern web. Google Toolbar is designed to help you find what you're looking for quickly and discover new things along the way.

