## X79 Extreme4-M

Intel® X79 Chipset
































- Premium Gold Caps (2.5 x longer life time), 100% Japan-made high-quality Conductive Polymer Capacitors
- Intel® Core™ i7 processor family for the LGA 2011 Socket
- Supports Quad Channel DDR3 2400+(OC)
- Digi Power, Advanced V6 + 2 Power Phase Design
- 3 x PCIe 3.0 x16 Slots, Supports AMD Quad CrossFireX™ and NVIDIA® Quad SLI™
- Dr. Debug, Smart Switch Design: Power/Reset/Clear CMOS Switch with LED
- Supports ASRock X-FAN, XFast RAM, XFast LAN, XFast USB, XFast Charger, Graphical UEFI, UEFI System Browser, AXTU
- 7.1 CH HD Audio with Content Protection (Realtek ALC898 Audio Codec), Supports THX TruStudio™
- Free Bundle: CyberLink MediaEspresso 6.5 Trial, ASRock MAGIX Multimedia Suite



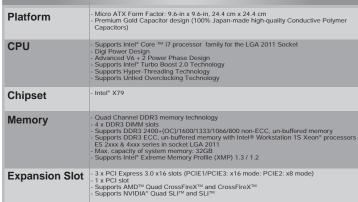

7.1 CH HD Audio with Content Protection (Realtek ALC898 Audio Codec) Premium Blu-ray audio support Supports THX TruStudio  $^{7d}$ **Audio** 

PCIE x1 Gigabit LAN 10/100/1000 Mb/s Broadcom BCM57781 IAN Supports Wake-On-LAN
Supports Energy Efficient Ethernet 802.3az
Supports PXE

**Detail Specification** 

I/O Panel
- 1 x PS/2 Mouse Port
- 1 x PS/2 Keyboard Port
- 1 x Coaxial SPDIF Out Port
- 1 x Coaxial SPDIF Out Port
- 1 x Optical SPDIF Out Port
- 6 x Ready-to-Use USB 2.0 Ports
- 1 x ESATA3 Connector
- 2 x Ready-to-Use USB 3.0 Ports
- 1 x R.1-45 LAN Port with LED (ACT/LINK LED and SPEED LED) Rear Panel I/O

T X I EEE 1394 POT WITH LED (ACT/LINK LED and SPEED LED)

1 X IEEE 1394 PORT

1 X Clear CMOS Switch with LED

HD Audio Jack: Side Speaker / Rear Speaker / Central / Bass / Line in / Front Speaker / Micronhone

2 x SATA3 6.0 Gb/s connectors by Intel\* X79, support RAID (RAID 0, RAID 1, RAID 5, RAID 10 and Intel Rapid Storage), NCO, AHCl and "Hot Plug" functions 1 x SATA3 6.0 Gb/s connector by ASMedia ASM1061, supports NCO, AHCl and "Hot Plug" functions SATA3

2 x Rear USB 3.0 ports by ASMedia ASM1042, support USB 1.0/2.0/3.0 up to 5Gb/s 1 x Front USB 3.0 header (supports 2 USB 3.0 ports) by ASMedia ASM1042, supports USB 1.0/2.0/3.0 up to 5Gb/s **USB 3.0** 

4 x SATA2 3.0 Gb/s connectors, support RAID (RAID 0, RAID 1, RAID 5, RAID 10 and Intel Rapid Storage 3.0), NCQ, AHCI and Hot Plug functions 3 x SATA3 6.0 Gb/s connectors 1 x IR header 1 x CIR header 1 x CIR header 1 x CIR header 1 x CIM port header 1 x HDML\_SPDIF header 1 x HDML\_SPDIF header 1 x HDML\_SPDIF header 1 x HEEE 1394 header 1 x Power LED header 1 x Power LED header 24 pin ATX power connector 24 pin ATX power connector 24 pin ATX power connector 5 LIXFire power connector 7 x USB 2.0 headers (support 4 USB 2.0 ports) 1 x USB 3.0 headers (supports 2 USB 3.0 ports) 1 x USB 3.0 header (supports 2 USB 3.0 ports) 1 x USP 3.0 headers (supports 2 USB 3.0 ports) 1 x USP 3.0 headers (supports 2 USB 3.0 ports) Connector

**Smart Switch** 

64Mb AMI UEFI Legal BIOS with GUI support Supports "Plug and Play" ACPI 1.1 Compliance Wake Up Events Supports jumperfree **BIOS Feature** 

SMBIOS 2.3.1 Support CPU, VCCSA, DRAM, VTT, CPU PLL, PCH1.1V, PCH1.5V Voltage Multi-adjustment

Drivers, Utilities, AntiVirus Software (Trial Version), CyberLink MediaEspresso 6.5 Trial, ASRock MAGIX Multimedia Suite - OEM) Support CD

ASRock Extreme Tuning Utility (AXTU)
ASRock Instant Boot
ASRock Instant Flosh
ASRock Instant Flosh
ASRock Stant Flosh
ASRock ASP Charger
ASRock Sanartview
ASRock ASRast LAN
ASRock XFast LAN
ASRock XFast LAN
ASRock XFast LAN
ASRock XFast Charger
ASRock XFast RAM
ASRock X-FAN
ASRock X-FAN
CASROCK X-FAN
CASROCK X-FON
CASTOR CASTOR CONTROL
CPU Frequency Stepless Control
ASRock U-COP
Boot Fallure Guard (B.F.G.) **Unique Feature** 

- Boot Failure Guard (B.F.G.) Good Night LED

**Hardware Monitor** 

CPU Temperature Sensing
Chassis Temperature Sensing
CPU/Chassis/Power/SB Fan Tachometer
CPU/Chassis Quiet Fan (Allow Chassis Fan Speed Auto-Adjust by CPU Temperature)
CPU/Chassis/SB Fan Multi-Speed Control
Voltage Monitoring: +12V, +5V, +3.3V, CPU Vcore

Microsoft® Windows® 7 / 7 64-bit / Vista™ / Vista™ 64-bit / XP / XP 64-bit compliant os

FCC, CE, WHOL ErP/EuP Ready (ErP/EuP ready power supply is required) Certifications

1 x ASRock SLI\_Bridge Card Quick Installation Guide, Support CD, I/O Shield 2 x SATA Data Cables (Optional) Accessories

## X79 Extreme4-M

Intel® X79 Chipset

#### Next-Gen PCIe 3.0 Support





#### **Get PCI-E 3.0 Benefits**

- Higher bandwidth per lane 1GB/s
- Higher efficiency 98.5% encoding efficiency
- 100% backward compatible with previous PCI-E 2.0 / 1.0 standard

PCI-E architecture	Raw bit rate	Bandwidth per lane	Encoding Efficiency
PCI-E 2.0	5.0GT/s	500MB/s	80%
PCI-E 3.0	8.0GT/s	1GB/s	98.5%

PCI-E 3.0 requires both a supporting CPU and motherboard at the same time.

Currently Intel\* Socket 2011 Sandy Bridges-E Processor doesn't support PCI-E 3.0, but this motherboard is already PCI-E 3.0 hardware ready it depends on Intel CPU to enable PCI-E 3.0 Peace check Intel worksite for information on future CPU updates and releases.

## XFast RAM Technology



#### 5X Faster for Photoshop Execution



The XFast RAM will create a virtual disk from system memory to boost up the performance.

#### Fully Utilize Wasted Memory under 32bit OS



XFast RAM is part of ASRock Extreme Tuning Utility (AXTU). It fully utilizes the memory space that cannot be used under 32-bit OS.

#### **Enhance Internet Surfing Experience**



Exactly shortens the loading time of previously visited webpages, making web surfing faster than ever.

#### Extend SSD / HDD Lifespan



It will reduce the frequency of accessing your SSDs or HDDs in order to extend their

### XFast LAN Technology



#### **LAN Application Prioritization**



You can configure your application priority ideally and/or add new programs.

#### **Lower Latency In Game**

594% Faster Time latency in World of Warcraft: Cataclysr ■ With XFast LAN ■ Without XFast LAN

After setting online game priority higher in XFast LAN, it can lower the latency in game.

#### Traffic Shaping



You can watch Youtube HD video and download files simultaneously.

#### **Real-Time Analysis Of Your Data**



With the status window, you can easily recognize which data streams you are currently transferring.

## XFast Charger Technology



XFast Charger is the best and fastest technology to charge your mobile devices via PC. With the superb XFast Charger USB port, users are assured to enjoy the quick charging experience anytime. In addition to Apple devices, it is also capable of charging the BC 1.1 standard smar








## XFast USB Technology



#### USB 3.0 Benchmark



ASRock Motherboard with XFast USB Technology ATTO Disk Benchmark - 4K Write Other Motherboard without XFast USB Technology 155648 KB/s 264.63% 42687 KB/s Faster

## X79 Extreme4-M

Intel® X79 Chipset

# www.asrock.com

#### **Graphical UEFI**

- \* Graphical Visual Experience
- \* Mouse Enabling
  \* Supports 3TB bootable HDD



#### **UEFI System Browser**

The UEFI system browser can let you easily check your current system configuration in UEFI setup.



#### THX TruStudio

Delivering the fullest audio experience for games, music and movies



#### **AXTU**

ASRock Extreme Tuning Utility (AXTU) is an all-in-one software to fine-tune different features in an userfriendly interface, which includes Hardware Monitor, Fan Control, Overclocking, OC DNA, IES and XFast RAM.



## Cyberlink MediaEspresso 6.5 Trial

The fastest video media conversation software



#### MAGIX Multimedia Suite

The ultimate solutions to enhance your media experience. From music management, music creation, video editing to photo management. Simply do more with your media than you ever thought possible.



## Digi Power

By adopting digital Pulse-width modulation (PWM), the ASRock X79 Extreme4-M can provide CPU Vcore voltage more efficiently and smoothly. Compared to analog PWM, Digi Power can optimize the CPU power solution and provide a proper and stable Vcore for the processor

### Advanced V6 + 2 **Power Phase**

The ASRock X79 Extreme4-M is designed with a V6 + 2 Power Phase, featuring sturdy components and completely smooth power delivery to the CPU. It offers unmatched overclocking capability and enhanced performance with the lowest temperatures for PC gaming enthusiasts.

## Premium Gold Caps

Premium Gold Caps are 100% Japan-made solid capacitors are sleek, high gloss caps with a premium gold coating representing long life and stable performance.

#### X-FAN

ASRock X-FAN will be automatically activated only when the system rises to a certain temperature under heavy-loading. Normally, ASRock X-FAN will remain deactivated to give users the quietest computing experience.







