# X79 Extreme9

Intel® X79 Chipset















ATX Form Factor: 12.0-in x 9.6-in, 30.5 cm x 24.4 cm
Premium Gold Capacitor design (100% Japan-made high-quality Conductive Polymer Capacitors) **Platform** 

Supports Intel® Core™ i7 processor family for the LGA 2011 Socket Digi Power Design Advanced 16 + 2 Power Phase Design Supports Intel® Turbo Boost 2.0 Technology Supports Hyper-Threading Technology Supports United Overclocking Technology CPU

Chipset

Quad Channel DDR3 memory technology 8 x DDR3 DIMM slots Supports DDR3 2400+(CC)/2133(OC)/1866(OC)/1600/1333/1066 non-ECC, un-b-Memory

Supports DDR3 2400+(OC)/2133(OC)/1866(OC)/1600/1333/1066 non-ECC, un-buffered memory Supports DDR3 ECC, un-buffered memory with Intel® Workstation 1S Xeon® processors 55 16xx/26xx/46xx series in socket LGA 2011 Max. capacity of system memory: 64GB Supports Intel® Extreme Memory Profile (XMP) 1.3 / 1.2

- 5 x PCI Express 3.0 x16 slots (PCIE1/PCIE2/PCIE4/PCIE5: x8/8/8/8 mode or x16/0/16/0 mode; PCIE6: x8 mode)
- 1 x PCI Express 2.0 x1 slot
Supports AMD Quad CrossFireX™, 3-Way CrossFireX™ and CrossFireX™
- Supports NVIDIA® Quad SLI™, 3-Way SLI™ and SLI™

**Expansion Slot** 

Audio

Supported by the bundled ASRock Game Blaster Creative Sound Core3D quad-core sound and voice processor Supports TAX TruStudio\*\* PRO Supports CrystalVoice Supports EAX1.0 to EAX5.0

LAN

PCIE x1 Gigabit LAN 10/100/1000 Mb/s
Broadcom BCM57781
Supports Wake-On-LAN
Supports Energy Efficient Ethernet 802.3az
Supports Energy Efficient Ethernet 802.1az
Supports Dual LAN with Teaming function with the bundled ASRock Game Blaste Supports PXE

Rear Panel I/O

I/O Panel
- 1 x PS/2 Keyboard Port
- 6 x Ready-to-Use USB 2.0 Ports
- 2 x eSATA3 Connectors
- 4 x Ready-to-Use USB 3.0 Ports
- 1 x R.45 LAN Port with LED (ACT/LINK LED and SPEED LED)
- 1 x IEEE 1394 Port
- 1 x Clear CMOS Switch with LED

SATA3

- 2 x SATA3 6.0 Gb/s connectors by Intel® X79, support RAID (RAID 0, RAID 1, RAID 5, RAID 10 and Intel Rapid Storage 3.0), NCQ, AHCI and "Hot Plug" functions 2 x SATA3 6.0 Gb/s connectors by Marvell SE9220, support RAID (RAID 0 and RAID 1), NCQ, AHCI and "Hot Plug" functions 4 x SATA3 6.0 Gb/s connectors by 2 x Marvell SE9172 separately, support RAID (RAID 0 and RAID 1), NCQ, AHCI and Hot Plug" functions 4 x SATA3 6.0 Gb/s connectors by 2 x Marvell SE9172 separately, support RAID (RAID 0 and RAID 1), NCQ, AHCI and Hot Plug

4 x Rear USB 3.0 ports by TI®, support USB 1.0/2.0/3.0 up to 5Gb/s 2 x Front USB 3.0 headers (support 4 USB 3.0 ports) by TI®, support USB 1.0/2.0/3.0 up to 5Gb/s **USB 3.0** 

A x SATA2 3.0 Gb/s connectors, support RAID (RAID 0, RAID 1, RAID 5, RAID 10 and Intel Rapid Storage 3.0), NCQ, AHCl and Hot Plug functions

8 x SATA3 6.0 Gb/s connectors

1 x IR header

1 x CIR header

1 x CIR header

1 x CIR beader

1 x EIEE 1394 header

1 x File E 1394 header

1 x Power LED header

2 4 pin ATX power connector

2 x 8 pin 12V power connector

2 x 8 pin 12V power connector

3 x USB 2.0 headers (support 6 USB 2.0 ports)

2 x USB 3.0 headers (support 4 USB 3.0 ports)

1 x Dr. Debug with LED Connector

**Smart Switch** 

**BIOS Feature** 

64Mb AMI UEFI Legal BIOS with GUI support Supports "Plug and Play" - ACPI 1.1 Compliance Wake Up Events - Supports jumperfree

Supports jumperfree SMBIOS 2.3.1 Support CPU, VCCSA, DRAM, VTT, CPU PLL, PCH1.1V, PCH1.5V Voltage Multi-adjustment CPU, VCCSA, DRAM, VTT, CPU PLL, PCH1.1V, PCH1.5V Voltage Multi-adjustment

Drivers, Utilities, AntiVirus Software (Trial Version), CyberLink MediaEspresso 6.5 Trial, ASRock Software Suite (ASRock MAGIX Multimedia Suite - OEM) Support CD

**Unique Feature** ASRock Extreme Tuning Utility (AXTU) ASRock Instant Boot

ASRock Instant Flash ASRock APP Charger ASRock SmartView

ASRock SmartView ASRock XFast USB ASRock XFast LAN ASRock XFast Charger ASRock XFast RAM ASRock X-FAN ASRock Crashless BIOS

Hybrid Booster:
- CPU Frequency Stepless Control
- ASRock U-COP
- Boot Failure Guard (B.F.G.)
Good Night LED

Hardware Monitor

Accessories

CPU Temperature Sensing
Chassis Temperature Sensing
CPU/Chassis/Power/SB Fan Tachometer
CPU/Chassis/Power/SB Fan Tachometer
CPU/Chassis Quiet Fan (Allow Chassis Fan Speed Auto-Adjust by CPU Temperature)
CPU/Chassis/SB Fan Multi-Speed Control
Voltage Monitoring: +12V, +5V, +3.3V, CPU Vcore

Microsoft® Windows® 7 / 7 64-bit / Vista™ / Vista™ 64-bit / XP / XP 64-bit compliant

Certifications FCC, CE, WHQL ErP/EuP Ready (ErP/EuP ready power supply is required)

- 1 x ASRock SLL Bridge \_2S Card - 1 x ASRock 3-Way SLI-2S1S Bridge Card - 1 x ASRock Game Blaster - 1 x ASRock Game Blaster - 0 unick Installation Guide, Support CD, I/O Shield - 6 x SATA Data Cables (Optional) - 2 x SATA 1 to 1 Power Cables (Optional) - 1 x Front USB 3.0 Panel - 4 x HDD Screws - 6 x Chassis Screws - 1 x Rear USB 3.0 Bracket

















## Product Brief

- Premium Gold Caps (2.5 x longer life time), 100% Japan-made high-quality Conductive Polymer Capacitors
- Intel® Core™ i7 processor family for the LGA 2011 Socket
- Supports Quad Channel DDR3 2400+(OC) memory, 8 DIMM slots, Max capacity up to 64GB
- Digi Power Design, Advanced 16 + 2 Power Phase Design
- 5 x PCIe 3.0 x16 Slots, Supports AMD 3-Way CrossFireX™ and NVIDIA® 3-Way SLI™
- Broadcom Dual LAN with Teaming Function
- Supports ASRock X-FAN, XFast RAM, XFast LAN, XFast USB, XFast Charger, Graphical UEFI, UEFI System Browser, AXTU
- Creative Sound Core3D 7.1 CH, Supports THX TruStudio
- Free Bundle: ASRock Game Blaster, CyberLink MediaEspresso 6.5 Trial, ASRock MAGIX Multimedia Suit

Intel® X79 Chipset



#### **Digi Power**

More Precise, More Efficient

By adopting digital Pulse-width modulation (PWM), the ASRock X79 Extreme9 can provide CPU Vcore voltage more efficiently and smoothly. Compared to analog PWM. Digi Power can optimize the CPU power solution and provide a proper and stable Vcore for the processor.

## Advanced 16 + **2 CPU Power Phase**

Optimized Solution for CPU Power

The ASRock X79 Extreme9 is designed with a 16 + 2 Power Phase, featuring sturdy components and completely smooth power delivery to the CPU. It offers unmatched overclocking capability and enhanced performance with the lowest temperatures for PC gaming enthusiasts

## **Premium Gold** Caps

Top-Class Quality Guaranteed

Premium Gold Caps are 100% Japan-made solid capacitors. They are sleek, high gloss caps with a premium gold coating representing long life and stable performance.

## 8 x DDR3 2400+ DIMM Supports Quad Channel Memory

The ASRock X79 Extreme9 has 8 DIMM slots for Quad-Channel memory, supporting for 2400+(OC) MHz DDR3 memory!









## **Next-Gen PCIe 3.0** Support

Higher bit rate - 8.0GT/s

- Higher bandwidth per lane 1GB/s
  Higher efficiency 98.5% encoding
- 100% backward compatible with previous
- PCI-E 2.0 / 1.0 standard

#### X-FAN

#### The Smart Cooling Design

ASRock X-FAN will be automatically activated only when the system rises to a certain temperature under heavy-loading. Normally, ASRock X-FAN will remain deactivated to give users the quietest computing experience

## **Graphical UEFI**

- \* Graphical Visual Experience
- Mouse Enabling
- \* Supports 3TB bootable HDD

## **UEFI System Browser**

The UEFI system browser can let you easily check your current system configuration in UEFI setup



ntly Intel Socket 2011 Sandy Bridge-E Processor doesn't ort PCI-E 3.0, but this motherboard is already PCI-E 3.0

rare ready.

ends on Intel CPU to enable PCI-E 3.0. Please check Intel
te for information on future CPU updates and releases.







### XMP 1.3 Support

XMP 1.3 provides more precise DRAM timing settings! Simply load XMP 1.3 profile in the BIOS to explore the maximum speed of your DDR3 memory. For unbelievably powerful overclocking without having to adjust the settings in BIOS manually, the rig builder should look no longer than the XMP 1.3 support!

## **MAGIX Multimedia** Suite

The ultimate solutions to enhance your media experience. From music management, music creation, video editing to photo management. Simply do more with your media than you ever thought possible

## Cyberlink **MediaEspresso** 6.5 Trial

The fastest video media conversation software

#### **AXTU**

ASRock Extreme Tuning Utility (AXTU) is an all-in-one software to fine-tune different features in an userfriendly interface, which includes Hardware Monitor, Fan Control Overclocking, OC DNA, IES and XFast RAM.












## **HyperDuo Plus Technology**

#### Gain 6X Faster Performance!

The onboard Marvell SE9220 controller supports Hardware RAID, providing high levels of storage reliability. While the SSD and HDD are connected, it supports HyperDuo Plus™ technology which can make the SSD become the cache of the HDD to enable SSD-like performance.



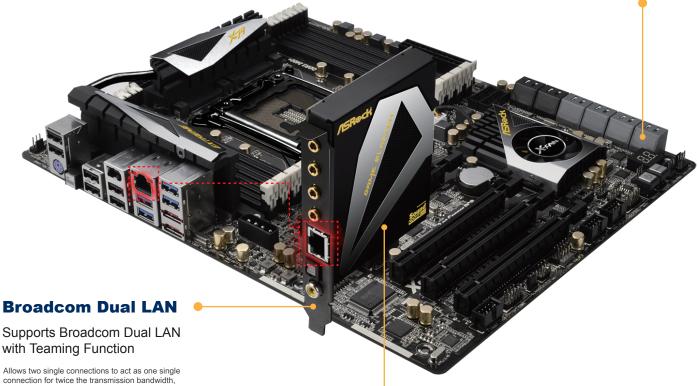

#### **ASRock Game Blaster**

making data transmission more effective.

Unleash Your Maximum Gaming Power

Supporting Creative Sound Core3D 7.1 CH HD audio and Broadcom gigabit lan via the bundled ASRock Game Blaster, ASRock X79 Extreme9 could give the extreme value for serious gamers!

#### Creative Sound Core3D Audio

- THX TruStudio PRO
- CrystalVoice • EAX 5.0
- EAX 5.0
   Full Blu-ray Profile 2.0 Audio Decoder Support

#### Broadcom Gigabit LAN

- Wirespeed performance increases user performance
- Extremely low power consumption enables environment-friendly designs

## Audio Processor (DSP) – Improves System Performance

- Independent audio processing capability and zero-waste of CPU utilization
- Capable of both time and frequency domain audio processing
- Advanced modes optimized for hardware acceleration















# X79 Extreme9

Intel® X79 Chipset



## **XFast RAM Technology**



#### • 5X Faster for Photoshop Execution



The XFast RAM will create a virtual disk from system memory to boost up the performance. For Photoshop, it can even perform 5X faster than before!

#### • Enhance Internet Surfing Experience



Exactly shortens the loading time of previously visited webpages, making web surfing faster than ever.

#### Fully Utilize Wasted Memory under 32bit OS



XFast RAM is part of ASRock Extreme Tuning Utility (AXTU). It fully utilizes the memory space that cannot be used under 32-bit OS.

#### • Extend SSD / HDD Lifespan



It will reduce the frequency of accessing your SSDs or HDDs in order to extend their lifesnan

## **XFast LAN Technology**



#### • LAN Application Prioritization



You can configure your application priority ideally and/or add new programs.

#### • Traffic Shaping



You can watch Youtube HD video and download files simultaneously.

#### Lower Latency In Game



After setting online game priority higher in XFast LAN, it can lower the latency in game.

## • Real-Time Analysis Of Your Data



With the status window, you can easily recognize which data streams you are currently transferring.

### **XFast Charger Technology**





#### XFast USB Technology



#### **USB 3.0 Benchmark**

