# G41C-VS

Intel® G41+ ICH7 Chipsets


















Detail Speci	ilication		
Platform	- Micro ATX Form Factor: 8.8-in x 7.8-in, 22.4 cm x 19.8 cm		
CPU	- LGA 775 for Intel® Core™ 2 Extreme / Core™ 2 Quad / Core™ 2 Duo / Pentium® Dual Core / Celeron® Dual Core / Celeron® Dual Core / Celeron® Supporting Penryn Quad Core Yorkfield and Dual Core Wolffale processors - Supports FSB1333/1066/800/533 MHz - Supports Hyper-Threading Technology - Supports United Overclocking Technology - Supports United Overclocking Technology - Supports EM64T CPU		
Chipset	- Northbridge: Intel® G41 - Southbridge: Intel® ICH7		
Memory	- Dual Channel DDR3/DDR2 memory technology - 2 x DDR3 DIMM slots - Supports DDR3 1333(OC)/1066/800 non-ECC, un-buffered memory - Max. capacity of system memory: 8GB - 2 x DDR2 DIMM slots - Supports DDR2 800/667/533 non-ECC, un-buffered memory - Max. capacity of system memory: 8GB		
Expansion Slot	- 1 x PCI Express x16 slot - 1 x PCI slot		
Graphics	- Intel® Graphics Media Accelerator X4500 - Pixel Shader 4.0, DirectX 10 - Max. shared memory 1759MB - Supports D-Sub with max. resolution up to 2048x1536 @ 75Hz		
Audio	- 5.1 CH Windows® Vista™ Premium Level HD Audio (Realtek ALC662 Audio Codec)		
LAN	- Atheros® PCIEx1 LAN AR8132L - Speed: 10/100 Ethernet - Supports Wake-On-LAN		
Rear Panel I/O	I/O Panel - 1 x PS/2 Mouse Port - 1 x PS/2 Keyboard Port - 1 x Serial Port: COM1 - 1 x VGA Port - 4 x Ready-to-Use USB 2.0 Ports - 1 x RJ-45 LAN Port with LED (ACT/LINK LED and SPEED LED) - HD Audio Jack: Line in / Front Speaker / Microphone		
Connector	- 2 x SATAII 3.0 Gb/s connectors (No support for RAID and "Hot Plug" functions) - 1 x ATA100 IDE connector (supports 2 x IDE devices) - 1 x Print port header - CPU/Chassis FAN connector - 24 pin ATX power connector - 4 pin 12V power connector - Front panel audio connector - 2 x USB 2.0 headers (support 4 USB 2.0 ports)		
BIOS Feature	- 8Mb AMI Legal BIOS - Supports "Plug and Play" - ACPI 1.1 Compliance Wake Up Events - SMBIOS 2.3.1 Support - VCCM, NB, VTT, GTLRef Voltage Multi-adjustment - Supports Smart BIOS		
Support CD	Drivers, Utilities, AntiVirus Software (Trial Version), ASRock Software Suite (CyberLink DVD Suite - OEM and Trial; Creative Sound Blaster X-Fi MB - Trial)		
Unique Feature	- ASRock OC Tuner - Intelligent Energy Saver - Instant Boot - ASRock Instant Flash - ASRock OC DNA - Hybrid Booster: - CPU Frequency Stepless Control - ASRock U-COP - Boot Failure Guard (B.F.G.)		
Hardware Monitor	- CPU Temperature Sensing - Chassis Temperature Sensing - CPU Fan Tachometer - Chassis Fan Tachometer - CPU Quiet Fan - Voltage Monitoring: +12V, +5V, +3.3V, CPU Vcore		
os	- Microsoft® Windows® 7 / 7 64-bit / Vista™ / Vista™ 64-bit / XP / XP 64-bit compliant		

/ XP / XP 64-bit compliant

Certifications

Accessories

- FCC, CE - EuP Ready (EuP ready power supply is required)

- Quick Installation Guide, Support CD, I/O Shield - 2 x SATA Data Cables (Optional)















## **Product Brief <<<**

- Supports FSB1333/1066/800/533 MHz CPUs
- Supports Dual Channel DDR3 1333 (OC) + DDR2 800
- Intel® Graphics Media Accelerator X4500,
   Pixel Shader 4.0, DirectX 10, Max. shared memory 1759MB
- EuP Ready
- Supports ASRock Instant Boot, Instant Flash,
   OC DNA, ASRock OC Tuner (Up to 143% CPU frequency increase)
- Supports Smart BIOS, Intelligent Energy Saver (Up to 20% CPU Power Saving)
- Free Bundle: ASRock Software Suite

The specification is subject to change without notice. The brand and product names are trademarks of their respective companies. Any configuration other than original product specification is not guaranteed.



# DDR2/DDR3

Combo Design


DDR2 800 / DDR3 1333 (OC)




# **DDR2** vs **DDR3** Memory Performance Comparison

Model	G41C-VS		
CPU	E7600		
OS	Win 7 64bit		
HDD	WD 160G		
ODD	LG GH22NS50		
PSU	350W		
BIOS	L0.06		
RAM	Kingston DDR2 800 2G*2	Transcend DDR3 1066 2G*2	
Frequncy	800	1066	
Items	Kingston DDR2 800 2G*2	Transcend DDR3 1066 2G*2	
Memory Bandwidth(Higher is better)	5.09GB/s	5.74GB/s	
Cache and Memory(Higher is better)	23.33GB/s	24.48GB/s	
Memeory Latency(Lower is better)	111ns	88ns	
Speed Factor(Lower is better)	106.9	88.9	

# With DDR3, memory bandwidth

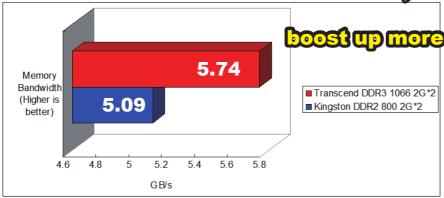

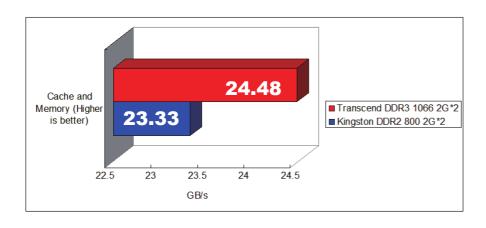

# G41C-VS


Intel® G41+ ICH7 Chipsets



#### **ASRock OC Tuner:**

ASRock OC Tuner is a user-friendly and untied tool which allows you to guard your system by hardware monitor function and overclock your hardware devices to get the best system performance






### **Energy Saving:**

Supports ASRock Intelligent Energy Saver (I.E.S)





CPU Power saving up to 20%



#### What is EuP?

EuP, stands for Energy Using Product, was a provision regulated by European Union to define the power consumption for the completed system. With the great quantity and the popularly using of the electrical products nowadays and the continuously increasing of the electrical products categories in the following 20 to 30 years, European Union decided to establish an effective strategy to solve the energy consumption problem. That is, according to EuP, the total AC power of the completed system shall be under 1.00W in off mode condition.





# **OC DNA**

Save your OC settings as a profile and share with friends. Try OC DNA now!

## **OC DNA Instruction**


#### Step 1

Save your BIOS OC settings as User Default in BIOS OC Tweaker menu. (For example: we name this User Default setting as "CPU\_OC3.8GHz")




#### Step 3

Press "Save" button to save the "CPU\_OC3.8GHz" OC settings as a profile.



#### Step 5


When the friend receives your "CPU\_OC3.8GHz" profile, he can press "Load" to load the "CPU\_OC3.8GHz" profile in OC DNA.

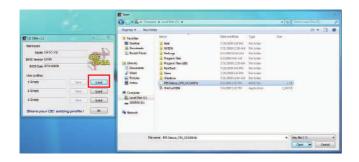

Now, you have successfully share your OC setting profile with your friends.

#### Step 2

Execute ASRock OC DNA under OS, you will find "CPU\_OC3.8GHz" as User Profile 1.




#### Step 4

Send the "CPU\_OC3.8GHz" profile to other friends.



#### Step 6

After that, the friend can enter into BIOS OC Tweaker menu to load the "CPU\_OC3.8GHz" profile as his BIOS OC settings.







### **ASRock Instant Boot**

ASRock Instant Boot is a new feature invented exclusively by ASRock. It can boot up system in an amazing speed, which is 10 times faster than traditional boot up. For home users or office PC users, ASRock Instant Boot can also

guarantee a clean Windows OS, and consumed less power! For details: <a href="http://www.asrock.com/feature/InstantBoot/index.asp">http://www.asrock.com/feature/InstantBoot/index.asp</a>

- \* This function is applicable ONLY to single user that does not secure ID and Password to their systems.
- \* The boot up time depends on the hardware configuration.

#### 10 Times Faster, Only 4 Secs to Boot Up to Windows!

#### **ASRock YouTube**

http://tw.youtube.com/watch?v=BucljXZVxXo



#### **ASRock Instant Flash**

ASRock Instant Flash is an exclusive and the most userfriendly BIOS flash utility developed by ASRock. It is embedded in Flash ROM which is used to update the system BIOS without having to enter operating systems like MS-DOS or Windows.



#### **Features**

Once executing ASRock Instant Flash, the utility will automatically detect all devices such as USB, hard disk or even floppy drive to find the exact BIOS for your system. Instead of giving you all BIOS in your devices, the Instant Flash just list BIOS versions that apply to your motherboard model only. For example, if you have many different BIOS of different motherboards saved in your devices, but you just need to flash your P45 motherboard, the Instant Flash will just list the P45 BIOS versions for you. This unique function allows you to easily select the suitable BIOS version instead of browsing through all data.



Instant Flash just list BIOS versions that apply to your motherboard model.





Click and start Flashing!



# G41C-VS Intel® G41+ ICH7 Chipsets











# CyberLink Power2Go 6.1 LE OEM

Power2Go 6 lets you burn and backup videos, photos, music and data onto Blu-ray Discs and DVDs.

# CyberLink MediaShow 4.1 SE OEM

Photo and video management software MediaShow edits videos and photos instantly, creates slideshow, and allows publishing directly to YouTube and Flickr.

# CyberLink PowerDVD 8.0 DTS Trial

World-renowned PowerDVD 8 DTS delivers outstanding DVD movie playback quality on your PC.

# **CyberLink PowerDirector 8.0 Trial**

PowerDirector - Video Editing software – edits high-definition videos including AVCHD, allows output to PSP iPod and Blu-ray Disc.

# CyberLink PowerBackup 2.5 Trial

PowerBackup backups valuable data on your PC.

### **Creative Sound Blaster X-Fi MB Trial**

The Sound Blaster X-Fi MB solution provides premium audio quality, effects and features for PC systems equipped with onboard audio.

For gamers, the EAX® ADVANCED HD 4.0, with its state-of-the-art Multi-Environment rendering and reverb modelling, delivers a much more realistic and immersive 3D gaming experience than your motherboard audio ever will.