


OC Button Firmware Update Procedure

Please refer to the following instructions to update the firmware for the OC Button.

Step 1. Please execute **Command Prompt** as **Administrator**.

Step 2. Please copy the **path** of the **Z890 Taichi OCF(1.0.1.20241108)Firmware** folder.

Step 3. Please enter "**cd path of the firmware folder**" and press ENTER to access the folder, and then execute "**Update_Z890_Taichi_OCF.cmd**" to update firmware.

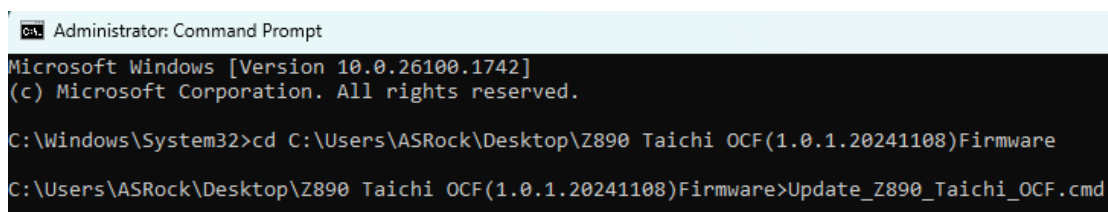


```
Administrator: Command Prompt
Microsoft Windows [Version 10.0.26100.1742]
(c) Microsoft Corporation. All rights reserved.

C:\Windows\System32>cd C:\Users\ASRock\Desktop\Z890 Taichi OCF(1.0.1.20241108)Firmware
C:\Users\ASRock\Desktop\Z890 Taichi OCF(1.0.1.20241108)Firmware>Update_Z890_Taichi_OCF.cmd
```

Step 4. Please wait until the firmware update to complete.

If the update is successful, the screen will display as following.

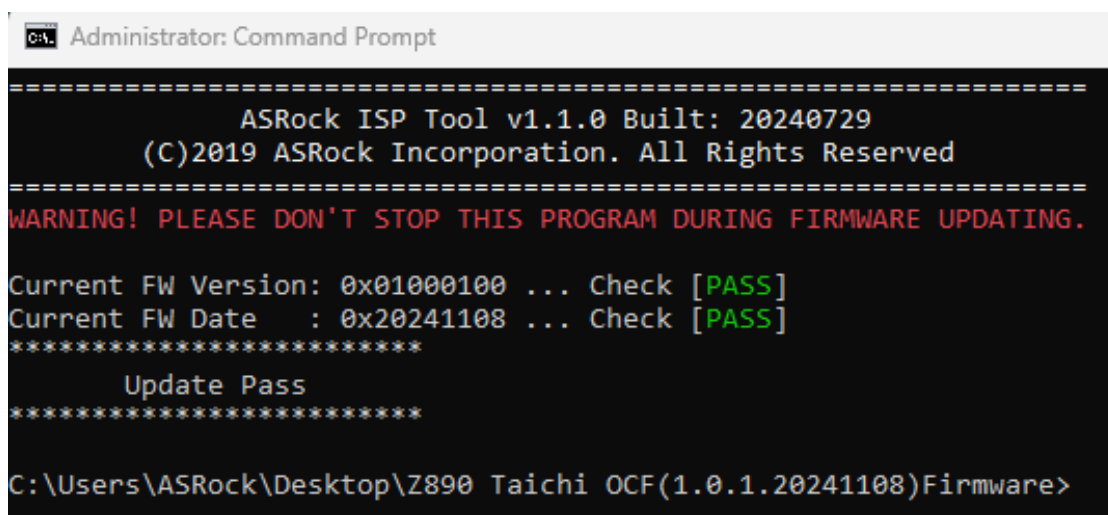

```
Administrator: Command Prompt

=====
                ASRock ISP Tool v1.1.0 Built: 20240729
                (C)2019 ASRock Incorporation. All Rights Reserved
=====
WARNING! PLEASE DON'T STOP THIS PROGRAM DURING FIRMWARE UPDATING.

Current FW Version: 0x01000100 ... Check [PASS]
Current FW Date   : 0x20241108 ... Check [PASS]
*****
                Update Pass
*****

C:\Users\ASRock\Desktop\Z890 Taichi OCF(1.0.1.20241108)Firmware>
```