H55M

Intel® H55 Chipset



< < < Micro ATX Form Factor: 9.6-in x 8.8-in, 24.4 cm x 22.4 cm Solid Capacitor for CPU power











Platform

Chipset

CPU

Detail Specification

Memory

Dual Channel DDR3 memory technology 2 x DDR3 DIMM slots Supports DDR3 2600+(OC)/2133(OC)/1866(OC)/1600/ 1333/1066 non-ECC, un-buffered memory Max. capacity of system memory: 8GB Supports Intel® Extreme Memory Profile (XMP)

1 x PCI Express 2.0 x16 slot (at x16 mode) 1 x PCI Express 2.0 x16 slot (at x4 mode, 2.5GT/s) 1 x PCI Express 2.0 x1 slot (2.5GT/s) 1 x PCI slot Supports ATI™ CrossFireX™ and Quad CrossFireX™ **Expansion Slot**

Graphics *

* Requires Processor with Intel® Graphics Technology
- Intel® Graphics Media Accelerator HD
- Pixel Shader 4.0, DirectX 10
- Max. shared memory 1759MB
- Multi VGA Output options: D-Sub, DVI-D and HDMI
- Supports HDMI 1.3a Technology with max. resolution up
to 1920x1200
- Supports DVI with max. resolution up to 1920x1200 @
60Hz
- Supports D-Sub with max. resolution up to 2048x1536 @
75Hz
- Supports Auto Lin Syng, Deep Color (401-x)

75Hz Supports Auto Lip Sync, Deep Color (12bpc), xvYCC and HBR (High Bit Rate Audio) with HDMI 1.3a (Compliant HDMI monitor is required) Supports HDCP function with DVI and HDMI ports Supports Full HD 1080p Blu-ray (BD) / HD-DVD playback

7.1 CH HD Audio (VIA® VT1718S Audio Codec) Audio

PCIE x1 Gigabit LAN 10/100/1000 Mb/s Realtek RTL8111DL Supports Wake-On-LAN LAN

I/O Panel Rear Panel I/O

|/O Pane|
-1 x PS/2 Keyboard Port
-1 x VGA/D-Sub Port
-1 x VGA/DVI-D Port
-1 x VGA/DVI-D Port
-1 x Optical SPDIF Out Port
-1 x Optical SPDIF Out Port
-4 x Ready-to-Use USB 2.0 Ports
-2 x Powered eSATAII/USB Connectors
-1 x RJ-45 LAN Port with LED (ACT/LINK LED and SPEED LED)
-HD Audio Jack: Rear Speaker / Central / Bass / Line in / Front Speaker / Microphone

4 x SATAII 3.0 Gb/s connectors, support NCQ, AHCI and Connector

- 4 x SATAII 3.0 Gb/s connectors, support NCQ, A
Hot Plug functions
- 1 x IR header
- 1 x Print Port header
- 1 x CPM port header
- 1 x CHM port header
- 1 x TPM Fieader
- 1 x TPM Fieader
- 1 x TPM Fieader
- 1 x Chassis Intrusion header
- CPU/Chassis/Power FAN connector
- 24 pin ATX power connector
- 8 pin 12V power connector
- 8 pin 12V power connector
- 50 in header
- Front panel audio connector
- 3 x USB 2.0 headers (support 6 USB 2.0 ports)
- 16Mh AMI Legal BIOS

BIOS Feature

3 x USB 2.0 Headers (support 6 USB 2.0 poins)
16Mb AMI Legal BIOS
Supports "Plug and Play"
ACPI 1.1 Compliance Wake Up Events
Supports jumperfree
SMBIOS 2.3.1 Support
CPU VID, CPU GFX, VCCM, SB, VTT, PCH_PLL Voltage
Multi-adjustment
Supports I. O. T. (Intelligent Overclocking Technology)

Drivers, Utilities, AntiVirus Software (Trial Version), ASRock Software Suite (CyberLink DVD Suite - OEM and Trial; Creative Sound Blaster X-Fi MB - Trial) **Support CD**

Unique Feature

ASRock OC Tuner
Intelligent Energy Saver
Instant Boot
ASRock Instant Flash
ASRock OC DNA
Hybrid Booster
- CPU Frequency Stepless Control
- ASRock U-COP
- Boot Failure Guard (B.F.G.)
Combo Cooler Option (C.C.O.)
Good Night LED
CPU Temperature Sensing

CHOON NIGHT LED
CPU Temperature Sensing
Chassis Temperature Sensing
CPU/Chassis/Power Fan Tachometer
CPU Quiet Fan
CPU/Chassis Fan Multi-Speed Control
CASE OPEN detection
Voltage Monitoring: +12V, +5V, +3.3V, CPU Vcore Hardware Monitor

Accessories

Microsoft® Windows® 7 / 7 64-bit / Vista $^{\text{TM}}$ / Vista $^{\text{TM}}$ 64-bit / XP / XP 64-bit compliant OS

Certifications FCC, CE, WHQL ErP/EuP Ready (ErP/EuP ready power supply is required)

Quick Installation Guide, Support CD, I/O Shield 2 x SATA Data Cables (Optional)

Chipset INTEL H55























Product Brief < < <


- Supports Dual Channel DDR3 2600+ (OC)
- Supports ATI™ CrossFireX™ and Quad CrossFireX™
- 1 x PCI Express 2.0 x16 slot (at x16 mode), 1 x PCI Express 2.0 x16 slot (at x4 mode, 2.5GT/s)
- Multi VGA Output options: D-Sub, DVI-D and
- Supports Full HD 1080p Blu-ray (BD) / **HD-DVD** playback
- 2 x Powered eSATAII/USB Connectors, Combo Cooler Option (C.C.O.)
- Supports ASRock Instant Boot, Instant Flash, OC Tuner, OC DNA, Intelligent Energy Saver, Multi-Speed Fan Control, Good Night LED
- ErP/EuP Ready

The specification is subject to change without notice. The brand and product names are trademarks of their respective companies. Any configuration other than original product specification is not quaranteed


H55M
Intel® H55 Chipset




The World's Fastest Memory DDR3 2600+ support

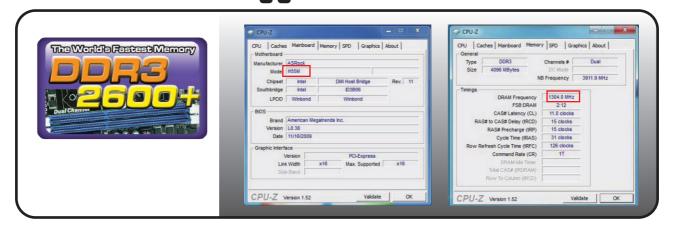

Supports ATI^{III} CrossFireX^{III} and Quad CrossFireX^{III}



Multi VGA Output options

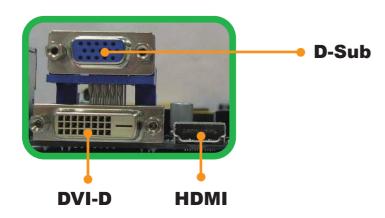



Requires a processor with Intel Graphics Technology

H55M

Intel® H55 Chipset







What is ErP/EuP?

ErP/EuP, stands for Energy Using Product, was a provision regulated by European Union to define the power consumption for the completed system. With the great quantity and the popularly using of the electrical products nowadays and the continuously increasing of the electrical products categories in the following 20 to 30 years, European Union decided to establish an effective strategy to solve the energy consumption problem. That is, according to ErP/EuP, the total AC power of the completed system shall be under 1.00W in off mode condition.



ASRock Instant Boot

ASRock Instant Boot is a new feature invented exclusively by ASRock. It can boot up system in an amazing speed,

which is 10 times faster than traditional boot up. For home users or office PC users, ASRock Instant Boot can also

guarantee a clean Windows OS, and consumed less power! For details: http://www.asrock.com/feature/InstantBoot/index.asp

- * This function is applicable ONLY to single user that does not secure ID and Password to their systems.
- * The boot up time depends on the hardware configuration.

10 Times Faster, Only 4 Secs to Boot Up to Windows!

ASRock YouTube

http://tw.youtube.com/watch?v=BucljXZVxXo



ASRock Instant Flash

ASRock Instant Flash is an exclusive and the most user-friendly BIOS flash utility developed by ASRock. It is embedded in Flash ROM which is used to update the system BIOS without having to enter operating systems like MS-DOS or Windows.



Features

Once executing ASRock Instant Flash, the utility will automatically detect all devices such as USB, hard disk or even floppy drive to find the exact BIOS for your system. Instead of giving you all BIOS in your devices, the Instant Flash just list BIOS versions that apply to your motherboard model only. For example, if you have many different BIOS of different motherboards saved in your devices, but you just need to flash your P45 motherboard, the Instant Flash will just list the P45 BIOS versions for you. This unique function allows you to easily select the suitable BIOS version instead of browsing through all data.



Instant Flash just list BIOS versions that apply to your motherboard model.





Click and start Flashing!







OC DNA

Save your OC settings as a profile and share with friends. Try OC DNA now!

OC DNA Instruction


Step 1

Save your BIOS OC settings as User Default in BIOS OC Tweaker menu. (For example: we name this User Default setting as "CPU_OC3.8GHz")




Step 3

Press "Save" button to save the "CPU_OC3.8GHz" OC settings as a profile.

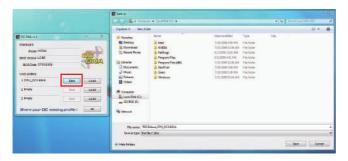

Step 5


When the friend receives your "CPU_OC3.8GHz" profile, he can press "Load" to load the "CPU_OC3.8GHz" profile in OC DNA.

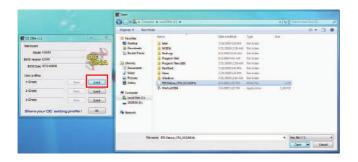

Now, you have successfully share your OC setting profile with your friends.

Step 2

Execute ASRock OC DNA under OS, you will find "CPU_OC3.8GHz" as User Profile 1.



Step 4

Send the "CPU_OC3.8GHz" profile to other friends.




Step 6

After that, the friend can enter into BIOS OC Tweaker menu to load the "CPU_OC3.8GHz" profile as his BIOS OC settings.





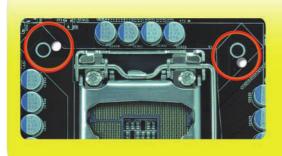

Combo Cooler Option

C.C.O. provides the flexible option to adopt two different CPU cooler types, Socket LGA 775* and LGA 1156**.

*C.C.O. may not be compatible with all Socket 775 CPU coolers. **O is for Socket LGA 1156 CPU cooler.




TPM support

Trusted Platform Module

Secure your working environment! TPM provides enhanced data protection, security via high-level encryption/decryption, and platform integrity.

Support Intel® Turbo Boost Monitor

Dynamically delivering optimal performance & energy efficiency.

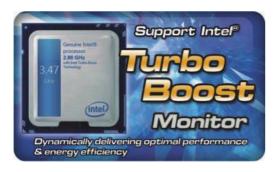





Idle

Working

















CyberLink Power2Go 6.1 LE OEM

Power2Go 6 lets you burn and backup videos, photos, music and data onto Blu-ray Discs and DVDs.

CyberLink MediaShow 4.1 SE OEM

Photo and video management software MediaShow edits videos and photos instantly, creates slideshow, and allows publishing directly to YouTube and Flickr.

CyberLink PowerDVD 8.0 DTS Trial

World-renowned PowerDVD 8 DTS delivers outstanding DVD movie playback quality on your PC.

CyberLink PowerDirector 8.0 Trial

PowerDirector - Video Editing software – edits high-definition videos including AVCHD, allows output to PSP iPod and Blu-ray Disc.

CyberLink PowerBackup 2.5 Trial

PowerBackup backups valuable data on your PC.

Creative Sound Blaster X-Fi MB Trial

The Sound Blaster X-Fi MB solution provides premium audio quality, effects and features for PC systems equipped with onboard audio.

For gamers, the EAX® ADVANCED HD 4.0, with its state-of-the-art Multi-Environment rendering and reverb modelling, delivers a much more realistic and immersive 3D gaming experience than your motherboard audio ever will.